

Alcohol Content Tester

These instructions describe the correct procedure for using the alcohol content tester.



WARNING: Explosive Fuel!

Gasoline is extremely flammable and its vapors can explode if ignited. Store gasoline only in approved containers, in well ventilated, unoccupied buildings, away from sparks or flames. Do not fill the fuel tank while the engine is hot or running, since spilled fuel could ignite if it comes in contact with hot parts or sparks from ignition. Do not start the engine near spilled fuel. Never use gasoline as a cleaning agent.

This Kit Contains –

Qty.	Description
1	Alcohol Content Tester
1	Installation Instructions

To Use –

1. Add water to the alcohol content tester up to the water fill line. See Figure 1.
2. Add the gasoline to be tested into the alcohol content tester up to the neck of the bottle.

3. Secure the cap onto the alcohol content tester and shake vigorously.
4. Set alcohol content tester on a level surface or hold upright. After a minute, the alcohol and gasoline will separate, and the gasoline will rise to the top. The percentage of alcohol lines will indicate the alcohol content of the fuel. See Figure 1.
5. Properly dispose of the fluid in the tester in accordance with local regulations.

Alcohol Content Tester

These instructions describe the correct procedure for using the alcohol content tester, part number.



WARNING: Explosive Fuel!

Gasoline is extremely flammable and its vapors can explode if ignited. Store gasoline only in approved containers, in well ventilated, unoccupied buildings, away from sparks or flames. Do not fill the fuel tank while the engine is hot or running, since spilled fuel could ignite if it comes in contact with hot parts or sparks from ignition. Do not start the engine near spilled fuel. Never use gasoline as a cleaning agent.

This Kit Contains –

Qty.	Description
1	Alcohol Content Tester
1	Installation Instructions

To Use –

1. Add water to the alcohol content tester up to the water fill line. See Figure 1.
2. Add the gasoline to be tested into the alcohol content tester up to the neck of the bottle.

3. Secure the cap onto the alcohol content tester and shake vigorously.
4. Set alcohol content tester on a level surface or hold upright. After a minute, the alcohol and gasoline will separate, and the gasoline will rise to the top. The percentage of alcohol lines will indicate the alcohol content of the fuel. See Figure 1.
5. Properly dispose of the fluid in the tester in accordance with local regulations.

The alcohol content tester may be cleaned, dried, and reused. Retain these instructions for future reference.

Gasoline/Alcohol Blends

Gasohol (up to 10% ethyl alcohol, 90% unleaded gasoline by volume) is approved as a fuel for Kohler engines. Other gasoline/alcohol blends including E20 and E85 are not to be used and not approved. Any failures resulting from use of these fuels will not be warranted.

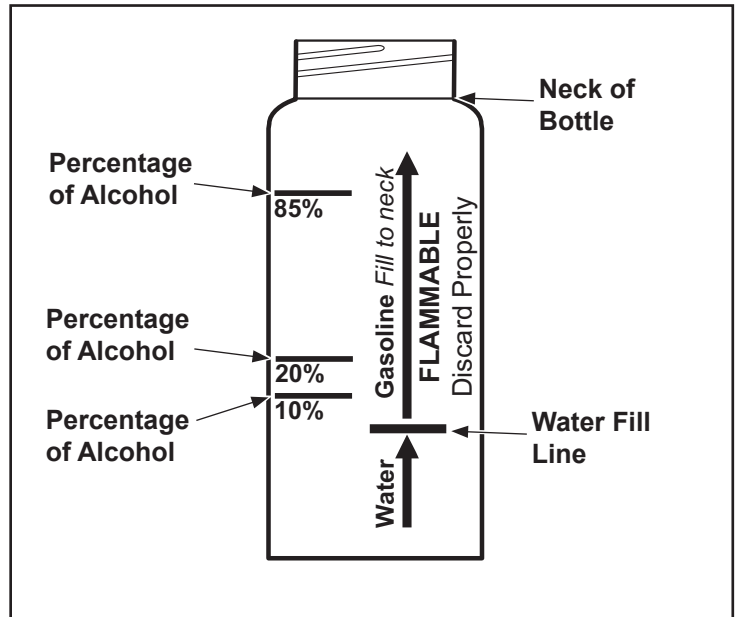


Figure 1. Alcohol Content Tester.

2

The alcohol content tester may be cleaned, dried, and reused. Retain these instructions for future reference.

Gasoline/Alcohol Blends

Gasohol (up to 10% ethyl alcohol, 90% unleaded gasoline by volume) is approved as a fuel for Kohler engines. Other gasoline/alcohol blends including E20 and E85 are not to be used and not approved. Any failures resulting from use of these fuels will not be warranted.

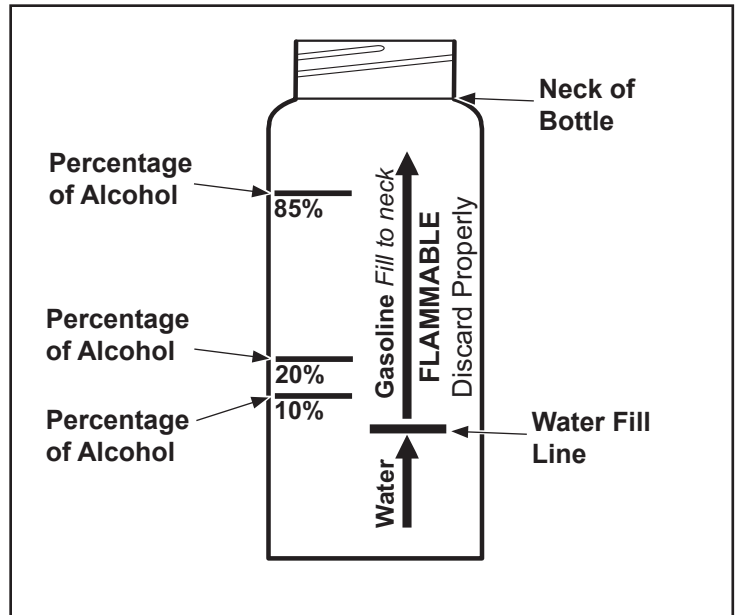


Figure 1. Alcohol Content Tester.

2